

2 SPEAKER SPEC. as following

ITEM	PARTS NUMBER	DIMENSIONAL	SENSITIVITY
1	TSK-Y0637-015N01-GP (711) (SPK)	Φ6.1×3.90mm	102±3dB (0dB=20 μ Pa,at 1KHz)
2	TSK-Y0638-016N02-GP (711) (SPK)	Φ6.0×3.80mm	102±3dB (0dB=20 μ Pa,at 1KHz)

## TSK-Y0637-015N01-GP

### ► Specifications

外形尺寸:φ6.1x3.90mm

声压级: 102±3dB (0dB=20μPa) at 1KHz,Input:0.126V,IEC711

额定输入功率:3mW

最大输入功率:5mW


阻抗: 15Ω ±15%

失真: ≤5%, From 1KHz, Input Power: 1mW


工作温度: -20°C ~ +60°C

储存温度: -20°C ~ +60°C

### ► Frequency Response Curve

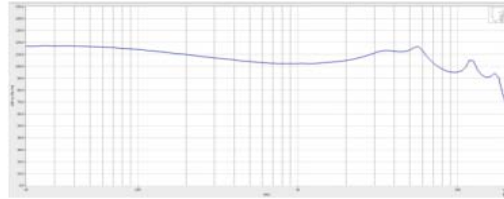

### ► Dimension(mm)

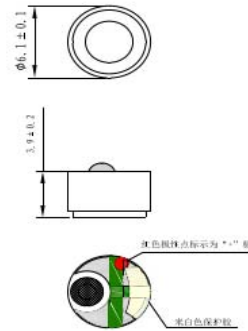

(01

## TSK-Y0638-016N02-GP

### ► Specifications

外形尺寸:φ6.0x3.80mm

声压级: 101±3dB (0dB=20μPa) at 1KHz,  
Input:0.126V,IEC711

额定输入功率:3mW

最大输入功率:5mW


阻抗: 16Ω ±15%

失真: ≤5%, at 1KHz, Input Power: 1mW

工作温度: -20°C ~ +60°C

储存温度: -20°C ~ +60°C

### ► Frequency Response Curve

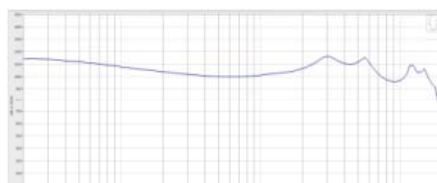

### ► Dimension(mm)

